




Engine Specifications

DIESEL ENGINE DATA




Engine Model	CUMMINS 4B3.9 G1
No Of Cylinder / Arrangement	4 , in Line
Cycle	4 Stroke
Aspiration	Turbocharged And Aftercooled
Bore X Stroke	102 X 120 mm
Displacement Total	3.9 liters
Compression Ratio	17.3 : 1
Combustion System	Direct injection
Direction Of Rotation	Anti Clockwise Viewed From Flywheel
Cooling System	Water Cooled
Air Intake System	Mounted Air Filters



GENERATOR DATA



Manufacture	Stamford
Phase Power	3
Voltage	230/400 Volt
Power Factor	0.8
Coupling	Direct
Bearing Number	1
Index Protection	23
Insulation Class	H
Exciter Type	S Hunt
Pole Number	4

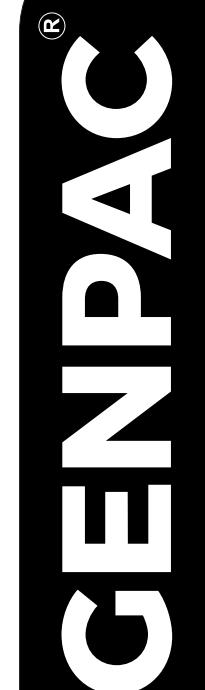

Rating 50 Hz (1500 RPM)	KVA	KW
Continuous (C)		
Prime (P)	30	24
Standby (S)	33	27

LUBRICATING SYSTEM



Maximum Oil Temperature	121 °C
Total Lubrication Capacity	10.9 Liters

SAFETY DEVICE




Low Oil Pressure
High Water Temperature and Overspeed

COOLING SYSTEM



Maximum Top Tank Temp	100 °C
Standard Thermostat (Modulating) Range	82-95 °C
Total Coolant Capacity	7.2 liters



FUEL SYSTEM



BYC A Direct Injection	7.1 L/H @ 100%
Fuel Consumption	Prime Power
	8.0 L/H @ 100%
	Standby Power

[®]

CENPAC

ELECTRICAL EQUIPMENT



Cranking Motor (Heavy Duty, Positive Engagement) 24V
Battery Charging System, Negative Ground 40A

Weight & Dimensions

DIMENSION		OPEN	SILENT	
Length	mm	1800	2250	
Width	mm	800	1100	
Height	mm	1400	1300	
Weight	Kg	980	1350	

